

PORTACOUNT® PRO+ RESPIRATOR FIT TESTER MODEL 8038

RESPIRATOR FIT TESTING
YOU CAN TRUST



No other fit tester can quantitatively fit test all types of respirators—gas masks, SCBAs, respirators, even N95 disposable (filtering-facepiece) respirators. The PortaCount® Pro+ Respirator Fit Tester eliminates the guesswork associated with tedious and error-prone qualitative fit test methods. If the mask requires fit testing, count on the PortaCount Pro+ fit tester to provide the fastest, easiest and best OSHA-accepted fit test method.

PortaCount Pro+ Respirator Fit Tester Kit Includes

- + Carrying case
- + AC adapter
- + Alcohol supply (enough for ~240 hours of operation)
- + FitPro™ Fit Test Software on CD
- + USB computer interface cable
- + Particle Generator (shipped separately)
- + Operation and service manual

For additional software information, see the TSI FitPro™ Fit Test Software Specification Sheet.


Features and Benefits

- + Greater simplicity with the built-in N95-Companion™ technology
- + Stand-alone operation—no external computer required*
- + Reduces need for an external particle generator
 - Redesigned DMA for enhanced performance
 - Ability to perform N95 fit testing with much lower ambient particle concentrations
- + Color touch screen
- + OSHA-compliant for all respirators, including N95
- + Measures fit factors greater than 10,000
- + Switch between different respirator types in under a minute
- + Automates fit testing with FitPro Fit Test software
- + Software prints fit test cards with fit test report or on ID cards

*A computer is necessary for report generation and fit test card printing



UNDERSTANDING, ACCELERATED

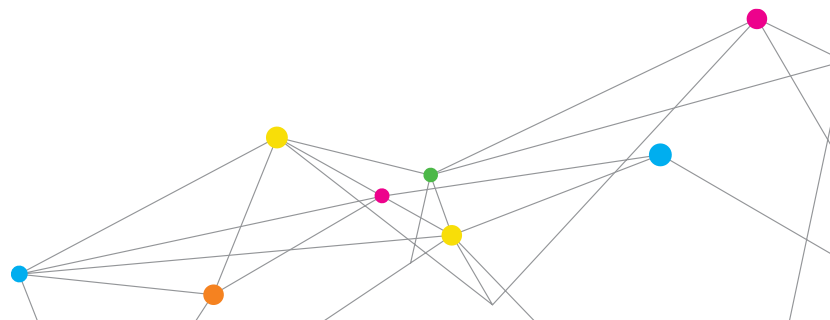

SPECIFICATIONS

PORTACOUNT® PRO+ RESPIRATOR FIT TESTER MODEL 8038

Fit Factor Range

1 to greater than 10,000, 1 to 200 for N95 masks

Typical Fit Factor Accuracy

±10% of reading

Respirator Facepieces that can be Fit Tested

Full-face elastomeric
Half-face elastomeric
NIOSH series-100 filtering-facepiece
NIOSH series-99 filtering-facepiece
NIOSH series-95 filtering-facepiece

Fit Factor Measurement

Direct measurement of fit factor (C_{out}/C_{in})*

Dimensions

6.75 in. x 8.5 in. x 9.5 in. (17 cm x 22 cm x 24 cm)

Weight

Unit Only	6.8 lb (3.1 kg)
With Standard Accessories and Case	18 lb. (8.2 kg)

Power

Autosensing 100 to 250 VAC, 50 to 60 Hz

Flow Rate

Sample	350 cm ³ /min
Total	1000 cm ³ /min (nominal)

Temperature Range

Operation	32 to 100°F (0 to 38°C)
Storage	-40 to 160°F (-40 to 70°C)

Alcohol

Hours Per Charge	6 hours at 70°F (21°C)
Alcohol Type	99.5%+ reagent grade isopropyl

Carrying Case

Dimensions (HWD)	9 in. x 13.7 in. x 19.5 in. (23 cm x 34.8 cm x 49.5 cm)
------------------	--

Pass/Fail Setting

User-selectable: 0 to 10,000

Factory Recalibration Interval

One year

Warranty

Two years on workmanship and materials

Minimum PC Hardware Requirements for FitPro Fit Test Software

Microsoft® Windows® XP, Windows Vista® (32-bit only), or Windows 7 (32- and 64-bit) software

Optional Accessories

Mask Sampling Adapters for select respirator models

*Mask leakage is measured simultaneously while test subject moves and breathes.

Model 8038 PortaCount® Pro+ Respirator Fit Tester is patented under U.S. Patent No. 6,125,845.

TSI, the TSI logo, FitPro, N95-Companion, and PortaCount are trademarks of TSI Incorporated. Microsoft, Windows, and Windows Vista are trademarks of Microsoft Corporation.



UNDERSTANDING, ACCELERATED

TSI Incorporated - Visit our website www.tsi.com for more information.

USA	Tel: +1 800 874 2811	India	Tel: +91 80 67877200
UK	Tel: +44 149 4 459200	China	Tel: +86 10 8251 6588
France	Tel: +33 4 91 11 87 64	Singapore	Tel: +65 6595 6388
Germany	Tel: +49 241 523030		