




# Single Gas Clip

Whether it's the hottest environment or the coldest, our Single Gas Clip (SGC) is designed and tested to provide worker safety in the harshest working conditions.

At Gas Clip Technologies, we enhance customer safety by using the latest technology. We test 100% of our portable

gas detectors, not just a random sample of units. That's why we can offer a low cost of ownership on our gas detectors.

There are no hidden service charges, no maintenance fees—just reliable units that will help your facility workers and contractors do their jobs safely, productively and cost effectively.

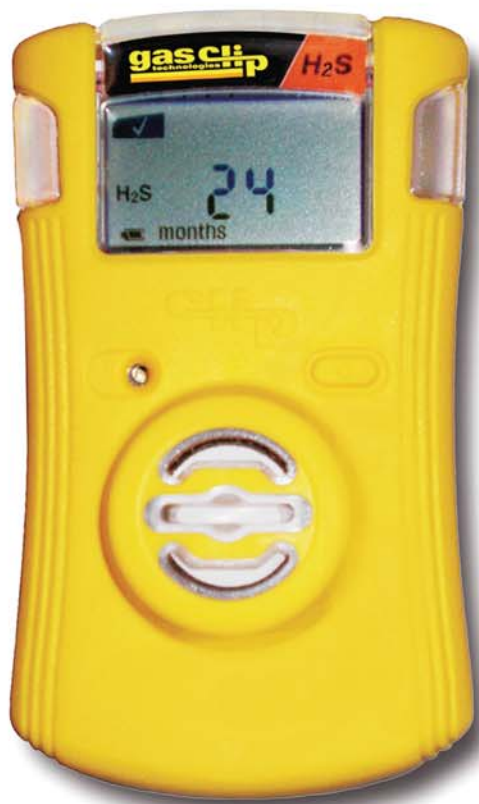

- ▶ Unmatched sensor reliability for H<sub>2</sub>S, CO or O<sub>2</sub>
- ▶ Adjustable alarm set points and real-time gas reading capability
- ▶ 50% larger battery capacity
- ▶ 0.1 ppm resolution for H<sub>2</sub>S sensor and display
- ▶ Two-way IR comms for event downloads, bump tests & updates
- ▶ Programmable unit identification
- ▶ “Bump check” confirmation/identification

For unmatched safety, reliability and productivity, choose the world's most advanced single gas detector, the Single Gas Clip.

**gas clip**  
technologies

**Portable gas detectors you can count on.**

[www.gascliptech.com](http://www.gascliptech.com) ♦ Toll Free: 877.525.0808

# Specifications



**SGC Dock**



**SGC Wall Mount Dock**



**GCT IR Link**

<b>Size</b>	85.6 mm H x 50 mm W x 29.2 mm D 3.37 in H x 1.97 in W x 1.15 in D
<b>Weight</b>	76g 2.7 oz
<b>Temperature</b>	H <sub>2</sub> S: -40°C to +50°C/-40°F to +122°F CO: -40°C to +50°C/-40°F to +122°F O <sub>2</sub> : -35°C to +50°C/-31°F to +122°F
<b>Humidity</b>	5% to 95% non-condensing relative humidity
<b>Alarms</b>	Visual, vibrating, audible (minimum 95dB)
<b>Tests</b>	Full function self-test on activation and every 20 hours; continuous automatic battery tests
<b>Operational Life</b>	Two years
<b>Ratings</b>	EMC Directives 2004/108/EC IP 67
<b>Certifications</b>	Standard(s): UL-913 & CAN/CSA-C22.2 No. 157  Class 1 Divisions 1 & 2, Groups A, B, C and D
	ETL CLASSIFIED  4003191
	
	ATEX: II 1 G Ex ia IIC T4 IECEX: EX ia IIC T4
<b>Warranty</b>	2 years from activation 1 year shelf life
<b>H<sub>2</sub>S</b>	Measuring range: 0-100 ppm Low alarm limit: 10 ppm High alarm limit: 15 ppm
<b>CO</b>	Measuring range: 0-300 ppm Low alarm limit: 35 ppm High alarm limit: 200 ppm
<b>O<sub>2</sub></b>	Measuring range: 0-30% Low alarm limit: 19.5% High alarm limit: 23.5%
<b>NOTES</b>	Real-time gas display or time remaining; Calibration optional; Adjustable alarm set points and bump check reminder



**Portable gas detectors you can count on.**

www.gascliptech.com ♦ Toll-free: 877.525.0808

2010-2014© Gas Clip Technologies, Inc. All Rights Reserved.

Distributed By:

EQUIPCO  
2100 Meridian Park Boulevard  
Concord, CA 94520  
(888) 234-5678  
www.equipcoservices.com

# We've put to bed one of the problems with portable gas detectors.



## The hibernate mode of our Single Gas Clip Plus allows it to rest when not in use—so you can extend the life of your units.


Sometimes it pays to get caught napping, like when it extends the life of your portable gas detectors. That's exactly the benefit of the "hibernate" mode of the Single Gas Clip Plus (SGC Plus) only from Gas Clip Technologies.

### Rest easy with our unmatched reliability.

Our SGC Plus is no softy. It can withstand the harshest working conditions - both the hottest and coldest environments. We perform quality control tests on every single monitor to ensure it delivers unmatched sensor reliability for testing H<sub>2</sub>S and CO.

### Ideal for seasonal/turnaround contractors or rental fleets.

Our hibernate mode allows you to place the

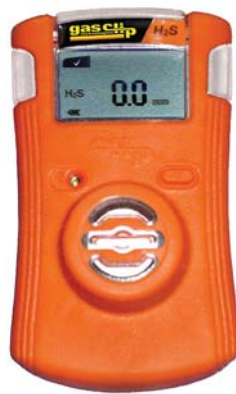

SGC Plus in a rested state when it's not in use. When a seasonal job or turnaround is finished, simply sync the unit with our GCT IR Link or SGC Dock to put the monitors to bed.

### Only pay for the months the detectors are in use.

When you're ready to use the SGC Plus again, simply press the power button to reactivate the unit. This way, you only pay for the months when the SGC Plus is in use. No other portable gas detector can say that.

### Call us today or visit [www.gascliptech.com](http://www.gascliptech.com).

For some eye-opening information about our SGC Plus, call 1.877.525.0808 or visit [www.gascliptech.com](http://www.gascliptech.com). Our units may rest, but we don't. Call now.



Portable gas detectors you can count on.

[www.gascliptech.com](http://www.gascliptech.com) ♦ Toll-Free: 877.525.0808

# Specifications




**SGC Dock**



**SGC Wall Mount Dock**



**GCT IR Link**

<b>Size</b>	85.6 mm H x 50 mm W x 29.2 mm D 3.37 in H x 1.97 in W x 1.15 in D
<b>Weight</b>	76g 2.7 oz
<b>Temperature</b>	H <sub>2</sub> S: -40°C to +50°C/-40°F to +122°F CO: -40°C to +50°C/-40°F to +122°F
<b>Humidity</b>	5% to 95% non-condensing relative humidity
<b>Alarms</b>	Visual, vibrating, audible (minimum 95dB)
<b>Tests</b>	Full function self-test on activation and every 20 hours; continuous automatic battery tests
<b>Operational Life</b>	Two years
<b>Ratings</b>	EMC Directive 2004/108/EC IP 67
<b>Certifications</b>	Standard(s): UL-913 & CAN/CSA-C22.2 No. 157
<b>ETL CLASSIFIED</b>  Intertek 4003191	Class 1 Divisions 1 & 2, Groups A, B, C and D
	ATEX: II 1 G Ex ia IIC T4
	IECEX: EX ia IIC T4
<b>Warranty</b>	3 years from activation/24 months of operational life, whichever occurs first; 1 year shelf life
<b>H<sub>2</sub>S</b>	Measuring range: 0-100 ppm Low alarm limit: 10 ppm High alarm limit: 15 ppm
<b>CO</b>	Measuring range: 0-300 ppm Low alarm limit: 35 ppm High alarm limit: 200 ppm
<b>Notes</b>	Real-time gas display or time remaining; adjustable alarm set points and bump check reminder



**Portable gas detectors you can count on.**

www.gascliptech.com ♦ Toll-free: 877.525.0808  
2010-2014® Gas Clip Technologies, Inc. All Rights Reserved

Distributed By:

EQUIPCO  
2100 Meridian Park Boulevard  
Concord, CA 94520  
(888) 234-5678  
www.equipc.services.com